



SAFEMASTER
Emergency Stop Module
BN 5930.48/203,
BN 5930.48/204

Translation
of the original instructions

0266337



E. Dold & Söhne GmbH & Co. KG
 Bregstraße 18 • 78120 Furtwangen • Germany
 Phone: +49 7723 654-0 • Fax +49 7723 654356
 dold-relays@dold.com • www.dold.com

Contents

Symbol and Notes Statement.....	11
General Notes	11
Designated Use	11
Safety Notes	11
Function Diagram	13
Circuit Diagrams	13
Approvals and Markings	13
Applications	13
Indicators	13
Notes	13
Connection Terminals	13
Block Diagrams	14
Technical Data	14
Technical Data	14
Standard Type.....	14
Ordering Example	14
Troubleshooting	15
Maintenance and repairs	15
Characteristic.....	15
Application Examples	16
Connection Technology	25
Dimensions (dimensions in mm)	25
Mounting / disassembly of the PS / PC-terminal strip	25
Safety Related Data	26
CE-Declaration of Conformity.....	27



Before installing, operating or maintaining this device, these instructions must be carefully read and understood.



Keep instructions for future reference



The installation must only be done by a qualified electrician!



Do not dispose of household garbage!
The device must be disposed of in compliance with nationally applicable rules and requirements.

To help you understand and find specific text passages and notes in the operating instructions, we have important information and information marked with symbols.

Symbol and Notes Statement



DANGER:
Indicates that death or severe personal injury will result if proper precautions are not taken.



WARNING:
Indicates that death or severe personal injury can result if proper precautions are not taken.



CAUTION:
Indicates that a minor personal injury can result if proper precautions are not taken.



INFO:
Referred information to help you make best use of the product.



ATTENTION:
Warns against actions that can cause damage or malfunction of the device, the device environment or the hardware / software result.

General Notes

The product hereby described was developed to perform safety functions as a part of a whole installation or machine. A complete safety system normally includes sensors, evaluation units, signals and logical modules for safe disconnections. The manufacturer of the installation or machine is responsible for ensuring proper functioning of the whole system. DOLD cannot guarantee all the specifications of an installation or machine that was not designed by DOLD. The total concept of the control system into which the device is integrated must be validated by the user. DOLD also takes over no liability for recommendations which are given or implied in the following description. The following description implies no modification of the general DOLD terms of delivery, warranty or liability claims.

Designated Use

The BN 5930.48/203, BN 5930.48/204 is used to interrupt a safety circuit in a safe way. It can be used to protect people and machines in applications with e-stop buttons and safety gates.

When used in accordance with its intended purpose and following these operating instructions, this device presents no known residual risks. Nonobservance may lead to personal injuries and damages to property.

Safety Notes



Risk of electrocution! **Danger to life or risk of serious injuries.**

- Disconnect the system and device from the power supply and ensure they remain disconnected during electrical installation.
- The device may only be used for the applications described in the mutually applicable operating instructions / data sheet. The notes in the respective documentation must be heeded. The permissible ambient conditions must be observed.
- The contact protection of the elements connected and the insulation of the supply cables must be designed in accordance with the requirements in the operating instructions / data sheet.
- Note the VDE and local regulations, particularly those related to protective measures.



Risk of fire or other thermal hazards! **Danger to life, risk of serious injuries or property damage.**

- The device may only be used for the applications described in the mutually applicable operating instructions / data sheet. The notes in the respective documentation must be heeded. The permissible ambient conditions must be observed. In particular, the current limit curve must be heeded.
- The device may only be installed and put into operation by experts who are familiar with this technical documentation and the applicable health and safety and accident prevention regulations.



Functional error! **Danger to life, risk of serious injuries or property damage.**

- The device may only be used for the applications described in the mutually applicable operating instructions / data sheet. The notes in the respective documentation must be heeded. The permissible ambient conditions must be observed.
- The device may only be installed and put into operation by experts who are familiar with this technical documentation and the applicable health and safety and accident prevention regulations.
- The unit should be panel mounted in an enclosure rated at IP 54 or superior. Dust and dampness may lead to malfunction.



Installation fault! **Danger to life, risk of serious injuries or property damage.**


- Make sure of sufficient protection circuitry at all output contacts for capacitive and inductive loads.



Attention!

- The safety function must be triggered during commissioning.
- **AUTOMATIC START !**
According to IEC/EN 60 204-1 part 9.2.5.4.2 and 10.8.3 it is not allowed to restart automatically after emergency stop. Therefore the machine control has to disable the automatic start after emergency stop.
- Opening the device or implementing unauthorized changes voids any warranty

SAFEMASTER Emergency Stop Module BN 5930.48/203, BN 5930.48/204

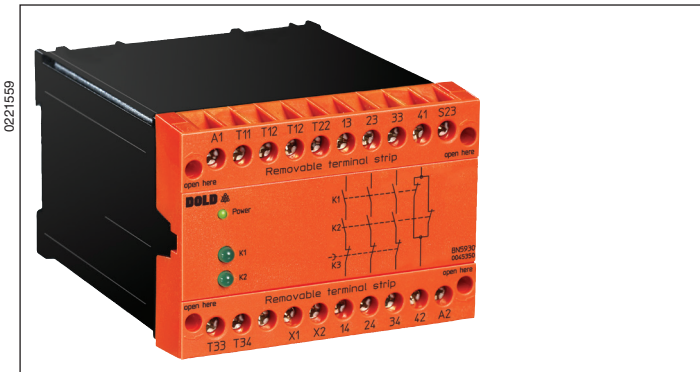


Your Advantages

- Can be used for long leads in the e-stop loop. This allows a long distance between e-stop module and the e-stop button.
- Crossfault detection in the e-stop circuit


Features

- **According to**
 - Performance Level (PL) e and category 4 to EN ISO 13849-1
 - SIL Claimed Level (SIL CL) 3 to IEC/EN 62061
 - Safety Integrity Level (SIL) 3 to IEC/EN 61508
- BN 5930.48/203 with cross fault detection by connecting 2 different phases, max. 400 V, BN 5930.48/204 with cross fault detection by connecting phase and neutral, max. 230 V
- Dual voltage version
- Emergency-stop circuit T12, T22: optionally for AC 110 V / DC 60 V or AC 230 V / DC 110 V
- Output: 3 NO, 1 NC contacts for AC 400 V
- 1-channel or 2-channel circuit
- LED displays for channel 1, 2 and mains
- Feedback circuit X1 - X2 for monitoring external contactors
- Removable terminal strips
- Width 100 mm


Function Diagram

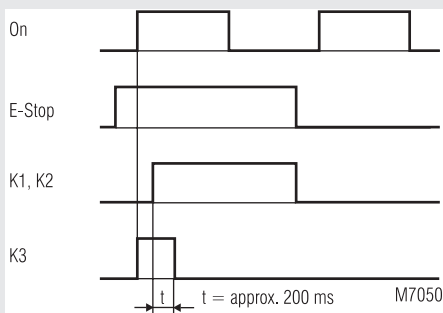

Circuit Diagrams

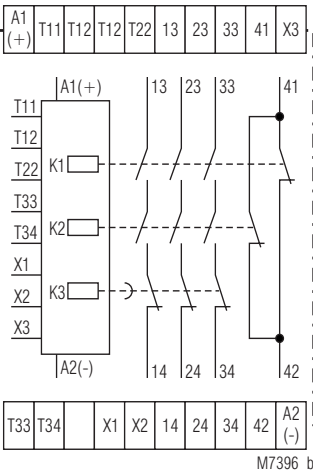

BN 5930.48/203

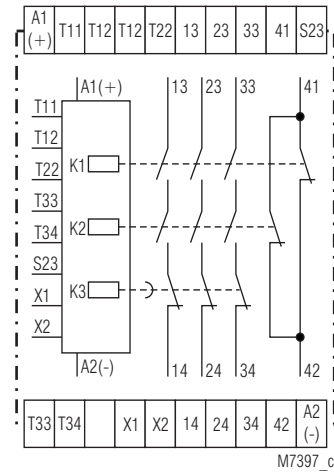

BN 5930.48/204

Approvals and Markings



Applications

- Protection of persons and machines
- Emergency stop circuits on machines
 - Monitoring safety gates

Indicators

- LED Power: On when operating voltage present
 LED K1: On when supply on relay K1
 LED K2: On when supply on relay K2


Notes

One or more BN3081 extension modules or external contactors with positively driven contacts can be used for contact multiplication of the emergency stop module BN 5930.


Connection Terminals

Terminal designation	Signal description
A1 (+)	+ / L
A2 (-)	- / N
T12, T22, X1, X2, X3, S23	Control inputs
T11, PE(-), T33, T34	Control outputs
13, 14, 23, 24, 33, 34	Forcibly guided NO contacts for release circuit
41, 42	Forcibly guided indicator output

Block Diagrams

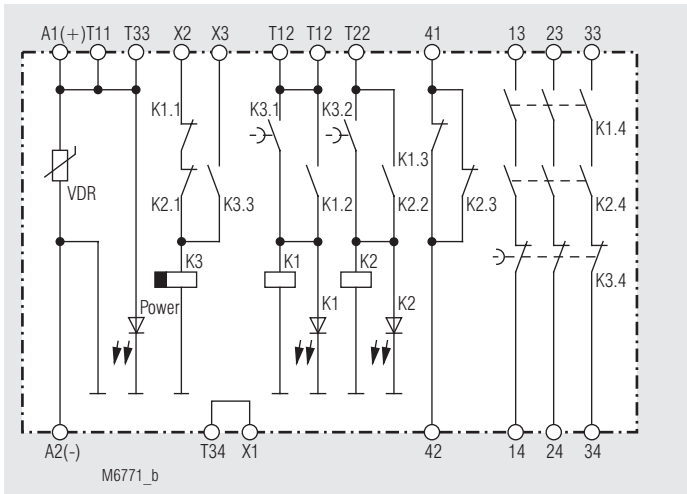

BN 5930.48/203

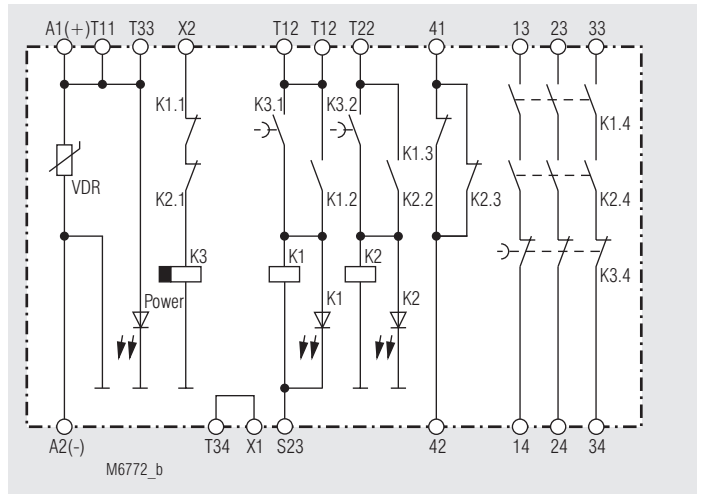

BN 5930.48/204 (with cross fault detection)

Technical Data

Input

Nominal voltage U_N:	AC 110 V* / DC 60 V* or AC 230 V* / DC 110 V* over terminal A1 - A2 other voltages on request
Voltage range: at 10% residual ripple: at 48% residual ripple:	AC 0.85 ... 1.1 U_N DC 0.9 ... 1.1 U_N DC 0.85 ... 1.1 U_N
Nominal consumption:	Approx. 3.9 VA at AC 230 V 50 / 60 Hz
Nominal frequency:	50 / 60 Hz
Control voltage T12, T22:	Same as nominal voltage
Control current:	Approx. 12 mA for K1 and K2 at AC 230 V
Fusing of the device:	Internal with PTC

Output

Contacts

BN 5930.48: 3 NO, 1 NC contacts

The contacts 13...33 / 14...34 are safety contacts.
The contact 41-42 can only be used for monitoring.

Response / release time

of K1 and K2:	35 ms / 35 ms
Release delay of K3:	Approx. 250 ms
Contact type:	Relay, forcibly guided
Output nominal voltage:	AC 400 V / DC 230 V
Thermal current I_{th}:	See continuous current limit curve (max. 10 A in one contact path)

Switching capacity

to AC 15		
NO contact:	3 A / AC 250 V	IEC/EN 60947-5-1
NC contact:	2 A / AC 250 V	IEC/EN 60947-5-1
to AC 15		
NO contact:	6 A / AC 230 V at 0.25 Hz	
NC contact:	2 A / AC 230 V at 0.25 Hz	
to DC 13		
NO contact:	2 A / DC 24 V	IEC/EN 60947-5-1
NC contact:	2 A / DC 24 V	IEC/EN 60947-5-1
to DC 13		
NO contact:	6 A / DC 24 V at 0.1 Hz	
NC contact:	6 A / DC 24 V at 0.1 Hz	

Electrical life

at AC 230 V, 6 A $\cos \varphi = 1$: > 5 x 10⁵ switching cycles

Permissible switching

frequency: 6000 switching cycles / h

Short circuit strength

max. fuse rating: 6 A gG / gL IEC/EN 60947-5-1

max. line circuit breaker: C 10 A

Mechanical life: 10 x 10⁶ switching cycles

Technical Data

General Data

Operating mode:	Continuous operation
Temperature range Operation:	- 15 ... + 55 °C at max. 90 % air humidity - 25 ... + 85 °C
Storage:	
Altitude:	≤ 2000 m
Clearance and creepage distances rated impulse voltage / pollution degree:	4 kV / 2 (basis insulation) IEC 60664-1 IEC/EN 61326-3-1
EMC Interference suppression:	Limit value class B EN 55011
Degree of protection: Housing:	IP 40 IEC/EN 60529
Terminals:	IP 20 IEC/EN 60529
Housing:	Thermoplast with V0 behaviour according to UL subject 94 Amplitude 0.35 mm
Vibration resistance:	frequency 10 ... 55 Hz IEC/EN 60068-2-6 15 / 055 / 04 IEC/EN 60068-1
Climate resistance: Terminal designation:	EN 50005
Wire fixing:	Flat terminals with self-lifting clamping piece IEC/EN 60999-1 Removable terminal strip
Mounting:	DIN rail IEC/EN 60715
Weight:	590 g


Dimensions

Width x height x depth: 100 x 74 x 121 mm

Standard Type

BN 5930.48/204	AC 230 V	50/60 Hz
Article number:	0045350	
• With cross fault detection by connecting to phase and neutral, max. 230 V		
• Output: 3 NO, 1 NC contacts		
• Nominal voltage U_N :	AC 230 V / DC 110 V	
• Width:	100 mm	

Ordering Example

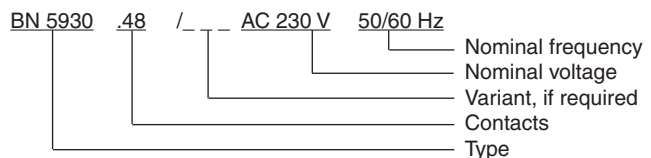




Troubleshooting

Failure	Potential cause
LED "Power" does not light up	Power supply not connected
LED "K1" lights up, but "K2" remains off	- Safety relay K1 is welded (replace device) - A 1-channel switch-off occurred on T22 (switch channel off on T12)
LED "K2" lights up, but "K1" remains off	- Safety relay K2 is welded (replace device) - A 1-channel switch-off occurred on T12 (switch channel off on T22)
Device cannot be activated	- Safety relay is welded (replace device)


Maintenance and repairs

- The device contains no parts that require maintenance.
- In case of failure, do not open the device but send it to manufacturer for repair.

Characteristic

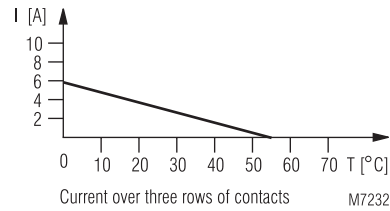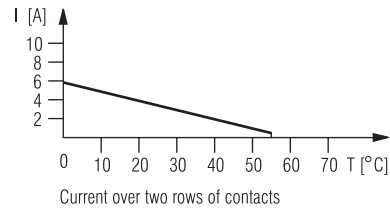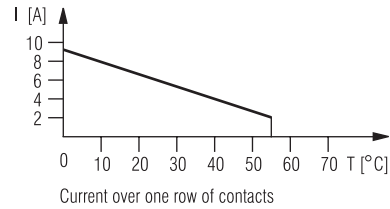


Continuous current limit curves depend on the ambient temperature

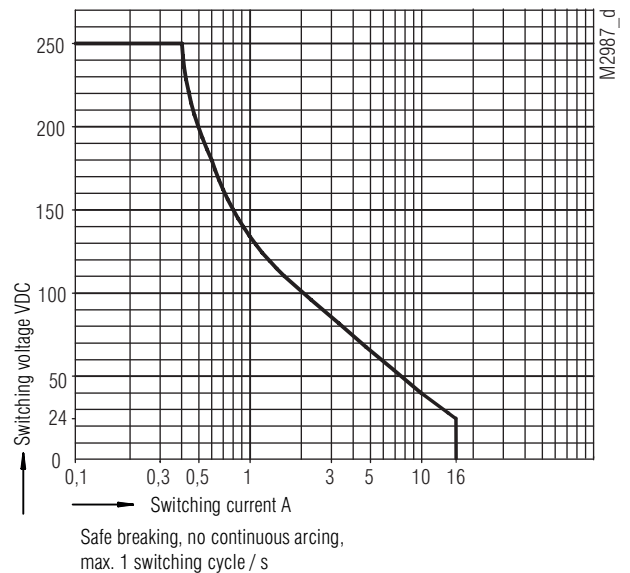


Arc limit curve

Application Examples

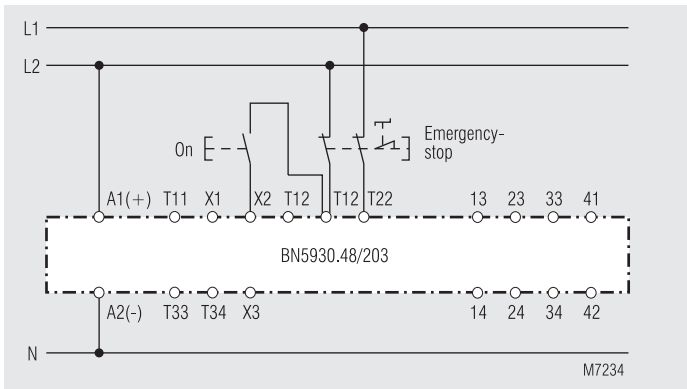


Two-channel emergency stop circuit. "Emergency stop" connected at two different phases, thereby giving "Cross fault detection".
Suited up to SIL3, Performance Level e, Cat. 4

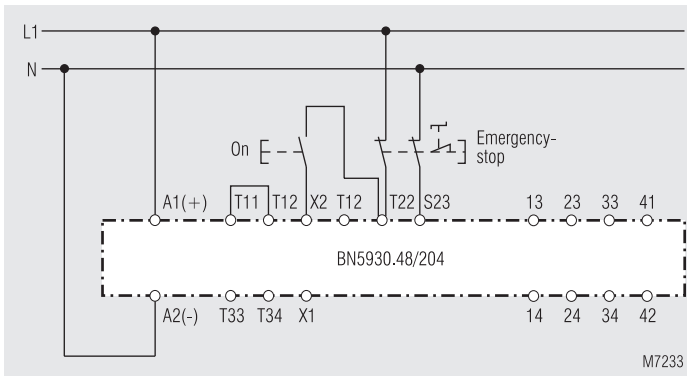






Two-channel emergency stop circuit with "Cross fault detection" in the alternating current network.
Suited up to SIL3, Performance Level e, Cat. 4

DE	Anschlussstechnik
EN	Connection Technology
FR	Technologie de connexion


DE	Maßbild (Maße in mm)
EN	Dimensions (dimensions in mm)
FR	Dimensions (dimensions en mm)

Klemmenleiste, abnehmbar Terminal strip, pluggable Bornier, amovibles

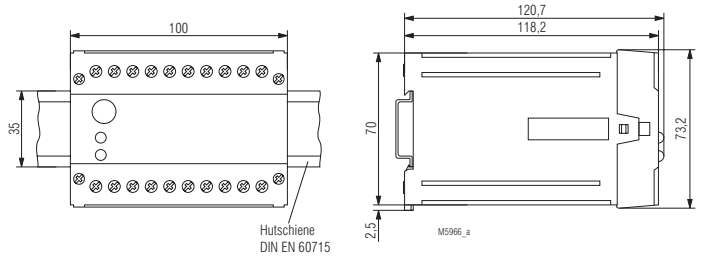


	\varnothing 6 mm / PZ 2 0,8 Nm 7 LB. IN
 M10248	A = 10 mm 1 x 0,5 ... 2,5 mm ² 1 x AWG 20 to 14 2 x 0,5 ... 2,5 mm ² 2 x AWG 20 to 14
 M10249	A = 10 mm 1 x 0,5 ... 1,5 mm ² 1 x AWG 20 to 16 2 x 0,5 ... 1,5 mm ² 2 x AWG 20 to 16
 M10250	A = 10 mm 1 x 0,5 ... 2,5 mm ² 1 x AWG 20 to 14 2 x 0,5 ... 2,5 mm ² 2 x AWG 20 to 14

DE	Montage / Demontage der PS / PC-Klemmenleiste
EN	Mounting / disassembly of the PS / PC-terminal strip
FR	Montage / Démontage des borniers PS / PC

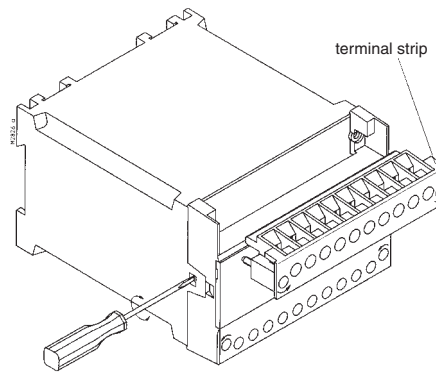

DE	Sicherheitstechnische Kenndaten
EN	Safety Related Data
FR	Données techniques sécuritaires

EN ISO 13849-1:		
Kategorie / Category:	4	
PL:	e	
MTTF _d :	240,5	a (year)
DC _{avg} :	99,0	%
d _{op} :	365	d/a (days/year)
h _{op} :	24	h/d (hours/day)
t _{cycle} :	3600	s/cycle
	≅ 1	/h (hour)

IEC/EN 62061 IEC/EN 61508		
SIL CL:	3	IEC/EN 62061
SIL:	3	IEC/EN 61508
HFT ¹⁾ :	1	
DC:	99,0	%
PFH _D :	2,05E-10	h ⁻¹
¹⁾ HFT = Hardware-Fehlertoleranz Hardware failure tolerance Tolérance défauts Hardware		


Anforderung seitens der Sicherheitsfunktion an das Gerät		Intervall für zyklische Überprüfung der Sicherheitsfunktion
Demand to our device based on the evaluated necessary safety level of the application.		Intervall for cyclic test of the safety function
Consigne résultant de la fonction sécuritaire de l'appareil		Interval du contrôle cyclique de la fonction sécuritaire
nach, acc. to, selon EN ISO 13849-1	PL e with Cat. 3 or Cat. 4	einmal pro Monat once per month mensuel
	PL d with Cat. 3	einmal pro Jahr once per year annuel
nach, acc. to, selon IEC/EN 62061, IEC/EN 61508	SIL CL 3, SIL 3 with HFT = 1	einmal pro Monat once per month mensuel
	SIL CL 2, SIL 2 with HFT = 1	einmal pro Jahr once per year annuel



DE	<p>Die angeführten Kenndaten gelten für die Standardtype. Sicherheitstechnische Kenndaten für andere Geräteausführungen erhalten Sie auf Anfrage.</p> <p>Die sicherheitstechnischen Kenndaten der kompletten Anlage müssen vom Anwender bestimmt werden.</p>
EN	<p>The values stated above are valid for the standard type. Safety data for other variants are available on request.</p> <p>The safety relevant data of the complete system has to be determined by the manufacturer of the system.</p>
FR	<p>Les valeurs données sont valables pour les produits standards. Les valeurs techniques sécuritaires pour d'autres produits spéciaux sont disponibles sur simple demande.</p> <p>Les données techniques sécuritaires de l'installation complète doivent être définies par l'utilisateur.</p>

DE	EG-Konformitätserklärung
EN	CE-Declaration of Conformity
FR	Déclaration de conformité européenne

EG - Konformitätserklärung
Declaration of Conformity
Déclaration de conformité européenne



Hersteller: E. Dold & Söhne GmbH & Co. KG
Manufacturer: / Fabricant:
Anschrift: Bregstraße 18
Address: / Adresse: 78120 Furtwangen
Germany

Produktbezeichnung: Not-Aus-Modul **BN5983.kkccc** mit: kk = 53
Product description: Emergency Stop Module **BN5983.kk/vvvccc** *with:* vvv = 104
optional ccc = /60 ... /69
Désignation du produit: Module d'arrêt d'urgence *avec:*

Das bezeichnete Produkt stimmt mit den Vorschriften folgender europäischer Richtlinien überein:
The indicated product is in conformance with the regulations of the following european directives:
Le produit désigné est conforme aux instructions des directives européennes:

Maschinenrichtlinie: 2006/42/EG EU-Abl. L157/24, 09.06.2006
Machinery directive: / Directives Machines:
EMV - Richtlinie: 2014/30/EU EU-Abl. L96/79, 29.03.2014
EMC - Directive: / Directives- CEM.:
RoHS - Richtlinie 2011/65/EU EU-Abl. L174/88, 01.07.2011
RoHS -Directive: / Directives - RoHS:

Prüfgrundsätze: EN ISO 13849-1:2015 EN 61508 Parts 1-7:2010
Basis of Testing: EN IEC 62061:2021 EN 60664-1:2007
Lignes de contrôle: EN IEC 60664-1:2020 + AC:2020
EN 61000-6-1:2007 EN 61000-6-2:2005 + AC:2005
EN 61000-6-3:2007 + A1:2011 + AC:2012 EN 61000-6-4:2007 + A1:2011
EN 61000-6-7:2015 EN 61326-1:2013
EN 61326-3-1:2017

Die Übereinstimmung eines Baumusters des bezeichneten Produktes mit der oben genannten Maschinenrichtlinie wurde bescheinigt durch:

Consistency of a production sample with the marked product in accordance to the above machiney directive has been certified by:
La conformité d'un échantillon du produit désigné aux directives machines susmentionnées a été certifiée par:

Benannte Stelle: TÜV Rheinland Industrie Service GmbH
Certification office: / l'organisme notifié: Am Grauen Stein, 51105 Köln
Nummer der benannten Stelle: NB0035
Number of certification office: / Numéro de l'organisme notifié:
Nummer der Bescheinigung: 01/205/5038.02/22
Certification number: / Numéro de certificat:
Ausstelldatum : 25.05.2022
Date of issue: / Date de délivrance:

Für die Zusammenstellung der technischen Unterlagen ist bevollmächtigt:
For the compilation of technical documents is authorized:
Pour la composition des documents techniques est autorisé:

Gamal Hagar, Entwicklungsleiter / R&D Manager

Rechtsverbindliche Unterschrift:

Signature of authorized person:
Signature autorisée :

Christian Dold, Produktmanagement / Productmanagement

Ort, Datum : Furtwangen, 08.06.2022
Place, Date: / Lieu, date:

Diese Original - Erklärung bescheinigt die Übereinstimmung mit den genannten Richtlinien, beinhaltet jedoch keine Zusicherung von Eigenschaften. Die Sicherheitshinweise der Produktdokumentation sind zu beachten.

This original declaration confirms the conformity of the mentioned directives but does not comprise any guarantee of the product characteristics. The safety directives of the product documentation are to be considered.

Cette déclaration originale certifie la conformité des directives nommées mais ne comprend aucune garantie des caractéristiques du produit. Les directives de sécurité de la documentation du produit sont à considérer.

