



# SAFEMASTER STS

## Safety Switch- and Key Interlock System

### Basic Unit

### YRXKM and YRXK01M

Translation  
of the original instructions

---



**E. DOLD & SÖHNE KG**  
P.O. Box 1251 • D-78114 Furtwangen • Germany  
Tel: +49 7723 6540 • Fax +49 7723 654356  
dold-relays@dold.com • www.dold.com

## Content

Symbol and Notes Statement.....	14
General Notes .....	14
Notes .....	14
Product description locking modules .....	15
Safety category.....	15
Mechanically coded actuators .....	15
Actuator J with self-adjustment.....	15
Actuator CS .....	15
Double actuators .....	15
EC type tested .....	15
Actuator C with angle compensation .....	15
CW bolt actuator.....	15
Actuator locking force .....	15
Monitoring of 2 doors with one unit (electrical).....	15
Mechanically coded key.....	16
Key labeling .....	16
Protection against confinement .....	16
Variable alignment / assembly .....	16
Easy to assemble .....	16
The right key to the field of application .....	16
Lockable key .....	16
Lock Out Tag Out (LOTO).....	16
Modular and expandable system.....	16
Mountable on mounting plate .....	16
Push-in connection technology (guard locking) .....	17
Plug connectors.....	17
Emergency unlocking .....	17
Pre-assembled cables .....	17
Mechanical release.....	17
Product Description .....	19
Approvals and Markings .....	19
Function.....	19
Design and Function.....	20
Indication .....	20
Circuit Diagrams .....	20
Mechanical switch positions YRKM .....	21
Mechanical switch positions YRK01M .....	21
Technical Data .....	22
Safety Related Data .....	22
Solenoid derating graph .....	23
Ordering Example.....	23
Variants and Combination Options .....	23
Ordering Example.....	23
Dimensional Drawings [mm].....	24



Before installing, operating or maintaining this device, these instructions must be carefully read and understood.



The installation must only be done by a qualified electrician!



Do not dispose of household garbage!  
The device must be disposed of in compliance with nationally applicable rules and requirements.



Storage for future reference

To help you understand and find specific text passages and notes in the operating instructions, we have important information and information marked with symbols.

## Symbol and Notes Statement



**DANGER:**  
Indicates that death or severe personal injury will result if proper precautions are not taken.



**WARNING:**  
Indicates that death or severe personal injury can result if proper precautions are not taken.



**CAUTION:**  
Indicates that a minor personal injury can result if proper precautions are not taken.



**INFO:**  
Referred information to help you make best use of the product.



**ATTENTION:**  
Warns against actions that can cause damage or malfunction of the device, the device environment or the hardware / software result.

## General Notes

The product hereby described was developed to perform safety functions as a part of a whole installation or machine. A complete safety system normally includes sensors (SAFEMASTER STS System), evaluation units, signals and logical modules for safe disconnections. The manufacturer of the installation or machine is responsible for ensuring proper functioning of the whole system. DOLD cannot guarantee all the specifications of an installation or machine that was not designed by DOLD. The total concept of the control system into which the device is integrated must be validated by the user. DOLD also takes over no liability for recommendations which are given or implied in the following description. The following description implies no modification of the general DOLD terms of delivery, warranty or liability claims.

## Notes



**Risk!**  
**Danger to life or risk of serious injuries.**

- Hazards must be ruled out before a key can be entered and the movable part of the guard can then be opened!



**INFO**

- For information regarding use in the system and validation according to EN ISO 13849-2, see SAFEMASTER STS application guide.
- Take advantage of the advice of the **E. DOLD & SÖHNE KG** specialists regarding the choice of units and combination of a system.



**ATTENTION !**

- To avoid wrong usage (e.g. by overload, mounting position or usage in acid, alkaline or other hostile ambient conditions) the limitations of the product have to be observed. Please check in advance if your application requires the usage of the more robust stainless steel model of SAFEMASTER STS. The requirements of the mounting and operating instruction must be fulfilled.

## Product description locking modules

Guard locking devices of the SAFEMASTER STS (plastic) family combine the proven operating principle and the advantages of electromechanical safety switches with 2-channel guard locking function. Thanks to guard lock monitoring, they can be used for both process and reliable personal protection. Different coding levels, very high locking forces and extensive diagnostic options enable use in almost any safety-relevant application.

### Safety category

Up to

**Cat. 4 / PL e**  
**SIL 3**

SAFEMASTER STS systems can be used as individual solutions in applications up to category 4, Performance Level e according to EN ISO 13849-1 can be used.

### EC type tested




Product Safety  
Functional  
Safety

www.tuv.com  
ID 0600000000


SAFEMASTER STS systems are logic units for safety functions according to Annex IV, S21 and are EC type tested in accordance with legal requirements.

### Mechanically coded actuators




All actuators belonging to the SAFEMASTER STS system are also available in the coding level medium, according to EN ISO 14119:2013.

### Actuator C with angle compensation




The C actuator with adjustable actuator angle is spring-mounted. It returns to its set state after a load.

### Actuator J with self-adjustment




When plugged in, the J actuator is self-adjusting over 4 degrees of freedom and retains its last alignment state. It can have an offset of up to 20 mm to compensate.

### CW bolt actuator




The CW bolt moves under the mounted unit, making the slider suitable for securing hinged doors with both left and right stop. It is designed in such a way that shear forces cannot act directly on the STS unit. It is particularly suitable for applications, where high forces can act on the STS units, e.g. in double swing doors.

### Actuator CS



The CS actuator is particularly suitable for harsh and dirty ambient conditions. In addition, the CS actuator is designed for applications with high shear and tensile forces, so that overload breaks can be largely excluded.


### Actuator locking force



The holding force  $F_{zh}$  according to EN ISO 14119:2013 is 4000 N.


(plastic versions 2000 N)

### Double actuators




For applications with Category 4, Performance Level e, SAFEMASTER STS units can also be equipped with 2 actuators.

### Monitoring of 2 doors with one unit (electrical)




SAFEMASTER STS units with double actuators can be used to monitor 2 adjacent accesses.

## Mechanically coded key




More than 50,000 codes are available for the keys of the SAFEMASTER STS system.

## The right key to the field of application




The SAFEMASTER STS system offers 2 different key designs.

## Key labeling




SAFEMASTER STS keys are labeled according to customer requirements. When plugged in, easily legible on the front side or on the top side when the key is removed.

## Lockable key




The keys of the SAFEMASTER STS system can be locked with padlocks.

## Protection against confinement

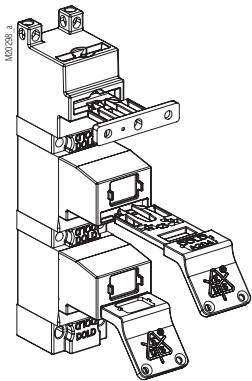


The keys can be removed and carried into the system as protection against lock-in. They also serve as protection against an unexpected restart of the machine.

## Lock Out Tag Out (LOTO)




Lock Out Tag Out (LOTO) processes can be very well integrated into SAFEMASTER STS systems..

## Variable alignment / assembly

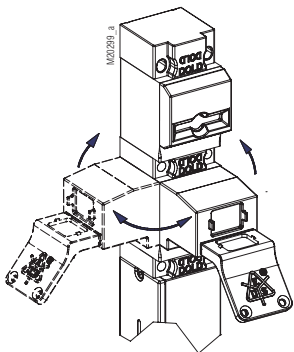


The modular design and the plug-in keys allow a variable alignment of the modules. Keys and actuators can therefore also be operated from the side.

## Modular and expandable system

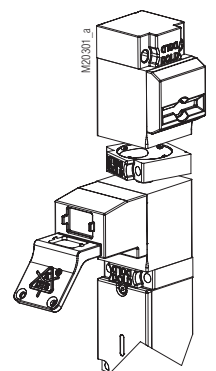


The modular design allows subsequent changes to the units or in the system...

## Easy to assemble

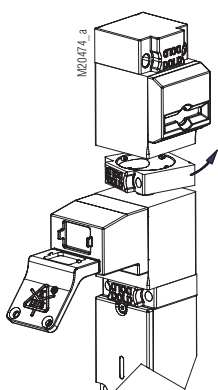


Units can be mounted simple and easily via ring locks (bayonet ring).

## Mountable on mounting plate

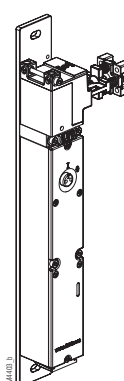

SAFEMASTER STS units can optionally be supplied on mounting plates. The alignment of the modules can be specified by the customer.


### Push-in connection technology (guard locking)



The screwless connection technology enables fast wiring.


Up to 1 mm<sup>2</sup> (without ferrule).

### Pre-assembled cables




SAFEMASTER STS units are optionally available with pre-assembled and already connected cable in different lengths.

### Plug connectors




The SAFEMASTER STS locking modules can also be equipped with connectors.

### Mechanical release



The SAFEMASTER STS locking modules with mechanical release permit release even in the event of a power failure.


### Emergency unlocking



The SAFEMASTER STS locking modules with emergency unlocking can be used there, where people locked up must be rescued. If the release can be reached within the danger zone, it can also be used as an emergency release.



### SAFEMASTER STS Safety Switch- and Key Interlock System Basic Unit YRXKM and YRXK01M

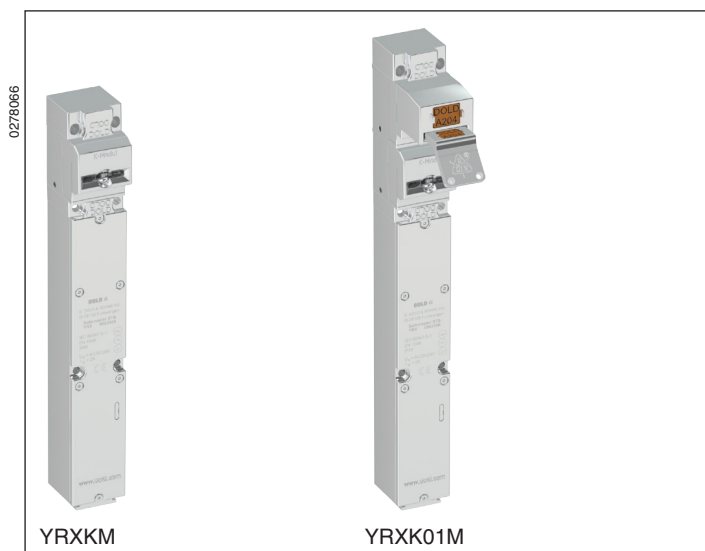

**Presentation in the deactivated condition:**  
Actuator removed

#### Product Description

Switch with separate actuator, disable function and guard locking function (YRXK01M). When activated the contacts which monitor the disable position switch. When the actuator is removed, the contacts switch for actuator monitoring.

To secure separating guards such as safety gates and hoods in machine and plant engineering.

#### STS-System Benefits

- EU-Test certificate according to the directive 2006/42/EG, annex IX
- For safety applications up to PLe/Category 4 according to EN ISO 13849-1
- Modular and expandable system
- Rugged stainless steel design
- Wireless mechanical safeguarding
- Combines the benefits of safety switch, solenoid locking and key transfer in a single system
- Easy installation through comprehensive accessories
- Protection against lock-in
- Coding level low, medium, high according to DIN EN ISO 14119:2014-03

#### Features

The units are particularly suitable for applications with:

- Lock-in danger
- Disables the unintentional closing of a separating guard
- Single-channel/ redundant/ diverse safety circuits
- Rugged ambient conditions

#### Approvals and Markings



#### Function

YRXKM and YRXKM based units can be regarded as safety switches (lock) without interlocking with additional blocking function.

YRXK01M and YRXK01M based units can be regarded as mechanical interlock with blocking function.

Switch with separate actuator and actuator insertion blocking. With the YRXKM version can be removed from the actuator at any time and switch the actuator contacts. The locking mechanism immediately blocks the actuator mechanism and prevents the actuator from being inserted again. The monitoring contacts of the locking mechanism also switch over. When the magnet is activated, the magnetic contacts switch and the actuator can be inserted. This switches the actuator contacts.

For the variant YRXK01M, the a key must be inserted into the 01 module before the actuator can be removed.


Actuator module K is available in accordance with EN ISO 14119:2013 with low and medium coding level. Both versions can optionally be equipped with an auxiliary release or with an emergency release. Padlock modules and key modules can also be added. The designation of the interlocking modules with emergency release is YRN module, with auxiliary release YRH module.

For safety reasons, an escape release cannot be added to this unit. These units can be connected to the Safemaster STS option module, which includes command functions and is designed for wiring cross-sections up to 1,5 mm².






## Mechanical switch positions YRXKM

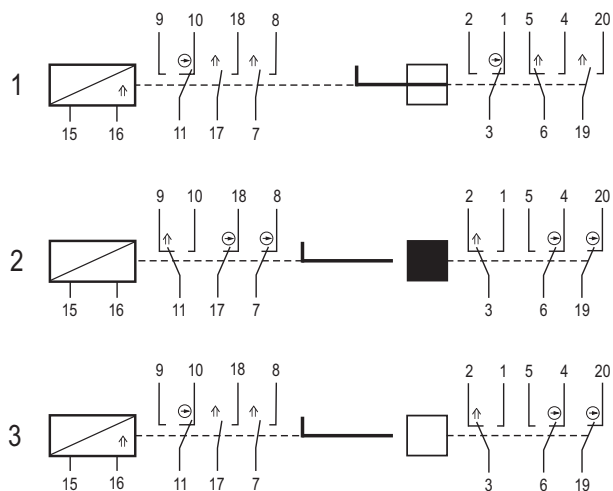

M20280\_b

## Mechanical switch positions YRXK01M

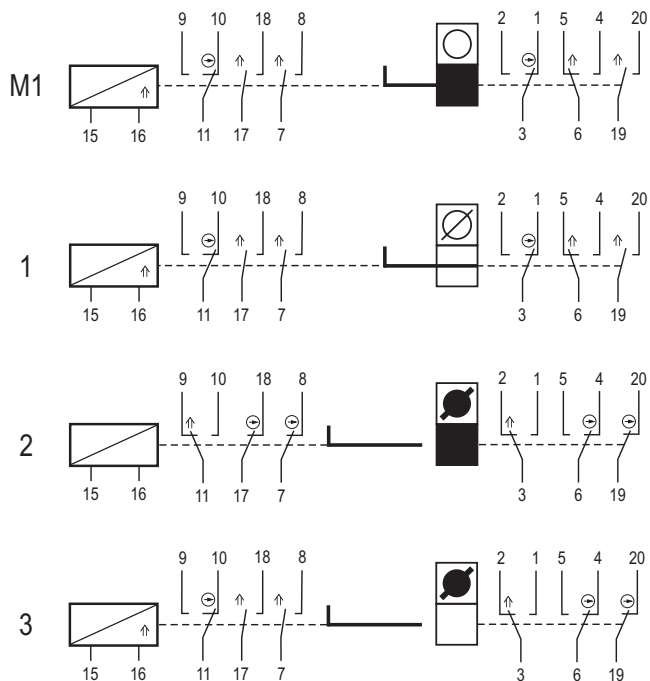

M20281\_b

	Coded key captive	Removal not possible
	Coded key plugged	Removal possible
	Coded key extracted	Plugging possible
	Coded key extracted and blocked	Plugging in not possible
	Actuator captive	Removal not possible
	Actuator plugged	Removal possible
	Actuator extracted	Plugging in possible
	Actuator extracted and blocked	Plugging in not possible

## Technical Data

### Mechanical Data

<b>Mechanical principle:</b>	Rotating axis with redundant actuation
<b>Enclosure:</b>	Stainless steel V4A / AISI 316L
<b>Internal parts:</b>	Stainless steel V4A / AISI 316 / AISI 630 (acc. to EN 10027-2; 1.4401; 1.4404; 1.4542; 1.4301; 1.4310)
<b>Degree of protection:</b>	IP 65
<b>Locking force:</b>	F <sub>zh</sub> 4000 N
<b>Locking module principle:</b>	Failure locking-proof
<b>Magnetic principle:</b>	Standby current or load current
<b>Operating speed</b> min. / max.:	100 / 500 mm/s

### Input

<b>Nominal voltage U<sub>N</sub></b> <b>(Measured nominal voltage):</b>	AC/DC 24 V
<b>Nominal voltage range:</b>	0,85 ... 1,1 U <sub>N</sub> (see solenoid derating graph)
<b>Power consumption:</b>	5,5 W

### Output

<b>Contacts</b>	
Door position:	1 NC contact, 2 antivalent changeover contacts
Sperrmechanismus:	2 NC contacts + 1 C/O contact
<b>Switching element:</b>	IEC EN 60947-5-1 Appendix K
<b>Switching principle:</b>	Change-over contact with forced opening spring contact
<b>Contact material:</b>	Ag / AgSnO <sub>2</sub>
<b>Max. switching frequency:</b>	360/h
<b>max. Betriebsstrom</b>	
Ruhestromprinzip:	2 A
Arbeitsstromprinzip:	1 A
<b>Utilization category of switching elements</b>	to AC 15:
1 A	
to DC 13:	0,5 A
<b>Electrical service life:</b>	5 x 10 <sup>6</sup> switching cycles
<b>Short circuit strength, max. fusing:</b>	2 A gG
<b>Conditional rated short-circuit current:</b> (rated conditional short circuit current):	1000 A
<b>Mechanical life:</b>	1 x 10 <sup>6</sup> switching cycles

### General Data

<b>Operating mode</b>	
<b>Mechanical life:</b>	100% ED
<b>Temperature range</b>	
Standby current principle:	- 25°C to + 60°C
Load current principle:	- 25°C to + 60°C
Storage:	- 40°C to + 80°C
<b>Rated impulse voltage:</b>	0,8 kV
<b>Rated insulation voltage:</b>	≤ 50 V
Overvoltage category:	III
Pollution degree:	2
<b>Connection method:</b>	Cage tension spring clamping
<b>Cross-section</b> min. / max.:	0,25 / 0,75 mm <sup>2</sup> (with ferrules and sleeve according to DIN 46228-4)
<b>Cable entry with thread:</b>	1 x M20x1,5
<b>Intended use:</b>	Up to max. cat. 4, PL e according to DIN EN ISO 13849-1
<b>Mounting:</b>	To DIN EN 50041
<b>Test principles:</b>	DIN EN ISO 13849-1:2008 DIN EN ISO 14119:2014-03 DIN EN 60947-5-1:2005 GS-ET-15:2011-02 GS-ET-19:2011-02 GS-ET-31:2010-02

## Safety Related Data

Data suitable for the PFHd summation method according to EN ISO13849-1: 2016				
Data according to EN ISO13849-1: 2016	YRXKM			YRXKKM
Category	2	3	3	4
PL	d	d	e	e
PFH <sub>D</sub>	2.12199E-09	1.36918E-09	1.08914E-09	1.50183E-10
T <sub>10D</sub>	20	20	20	20
CCF required	65 ...100	85 ...100	85 ...100	85 ...100
B <sub>10d</sub>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>
d <sub>op</sub> (d/a)	365	365	365	365
h <sub>op</sub> (h/d)	24	24	24	24
t <sub>cycle</sub> (h)	1	1	1	1
n <sub>op</sub>	8760	8760	8760	8760
Diagnostics Coverage ratio DC	60 %	60 %	90 %	99 %
Test interval	1 / year	1 / year	1 / month	1 / month

Data suitable for the PFHd summation method according to EN ISO13849-1: 2016				
Data according to EN ISO13849-1: 2016	YRXK01M			YRXKK01M
Category	2	3	3	4
PL	d	d	e	e
PFH <sub>D</sub>	3.18299E-09	2.05378E-09	1.63371E-09	2.00244E-10
T <sub>10D</sub>	20	20	20	20
CCF required	65 ...100	85 ...100	85 ...100	85 ...100
B <sub>10d</sub>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>
d <sub>op</sub> (d/a)	365	365	365	365
h <sub>op</sub> (h/d)	24	24	24	24
t <sub>cycle</sub> (h)	1	1	1	1
n <sub>op</sub>	8760	8760	8760	8760
Diagnostics Coverage ratio DC	60 %	60 %	90 %	99 %
Test interval	1 / year	1 / year	1 / month	1 / month

Category 2: The prerequisites for installation and integration into a category 2 architecture must be met

Category 3: The prerequisites for installation and integration into a category 3 architecture must be met

Category 4: The prerequisites for installation and integration into a category 4 architecture must be met, in particular 2 actuators must be used

PFH<sub>D</sub>: When used as a „stand-alone unit“ (not as part of a key transfer system), the safety parameters in the table above apply


When used as part of a **key transfer system**:

- PFH<sub>D</sub> total STS system = SUM PFH<sub>D1</sub> + ... PFH<sub>Dn</sub>
- Lowest category of a module = category of whole STS system
- Lowest DC of a module = DC entire STS unit



If the design of a unit is changed, the safety-related data may also change.

## Solenoid derating graph

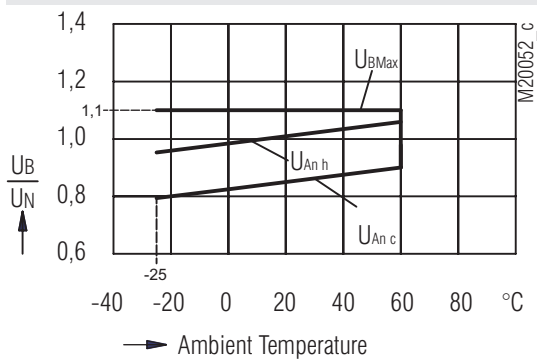

$U_{BMax}$  maximum power supply dependent upon temperature  
 $U_{An h}$  response voltage at coil temperature = ambient temperature  
 $U_{An c}$  response voltage at preceding agitation at  $1.1 \times U_N$

## Ordering Example

STS-Y R X K M

End module M  
 Key module K  
 X = Without manual unlocking  
 H = Manual unlocking  
 N = Emergency unlocking  
 F = Escape release  
 R = Closed circuit operation  
 A = Open circuit operation  
 Solenoid locking

## Variants of the guard locking modules

YRX Guard lock closed circuit operation  
 YRH Guard lock closed circuit operation with manual unlocking  
 YRN Guard lock closed circuit operation with emergency unlocking

## Ordering Example

STS-Y R X K 01 M

End module M  
 Key module 01  
 Actuator module K  
 X = Without manual unlocking  
 H = Manual unlocking  
 N = Emergency unlocking  
 R = Closed circuit operation  
 A = Open circuit operation  
 Solenoid locking

## Variants and Combination Options

Because of their modular design the basic units of the SAFEMASTER STS System can be combined and expanded according to customer requests. This allows for a variety of possible units and functions.

## Overview of the basic units

Functions	Safety switches design type 2	Safety switches design type 2 with solenoid lock	Mechanical units design type 2	Mechanical units with electrical monitoring	Mechanical units with electrical release
Units with standard function	SXA SXB	ZRHA ZRHBM	M10A M10BM MK01M	RX10A RX01BM RXK01M	YRXKM YRXK01M
Units with mechanical lock and forced key extraction	SX01A SX01BM	ZRH01A ZRH01BM	M11A M11BM MK11M	RX11A RX11BM RXK11M	YRX10A YRX10BM YRX11A YRX11BM
Units with optional key extraction	SXB01M	ZRHB01M	M10B01M	RX10B01M RX10K01M	YRX10B01M
Units without actuator	SX01M	ZRH01M	M12M	RX11M	YRX11M


For additional information refer to the data sheets of the individual modules and other basic units.

## Data sheets


Solenoid locking modules YRX/YRH/YAX  
 Actuator module K  
 Key module 01/10  
 End module M



Take advantage of the advice of the **E. DOLD & SÖHNE KG** specialists regarding the choice of units and combination of a system.

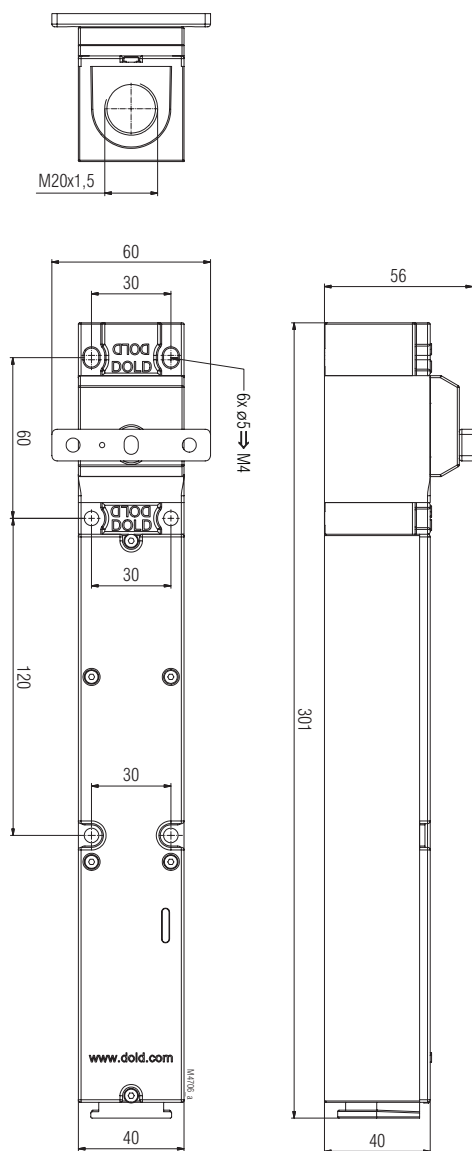

Illustrations: YRXKM  
Clearance tolerances  $\pm 2\%$

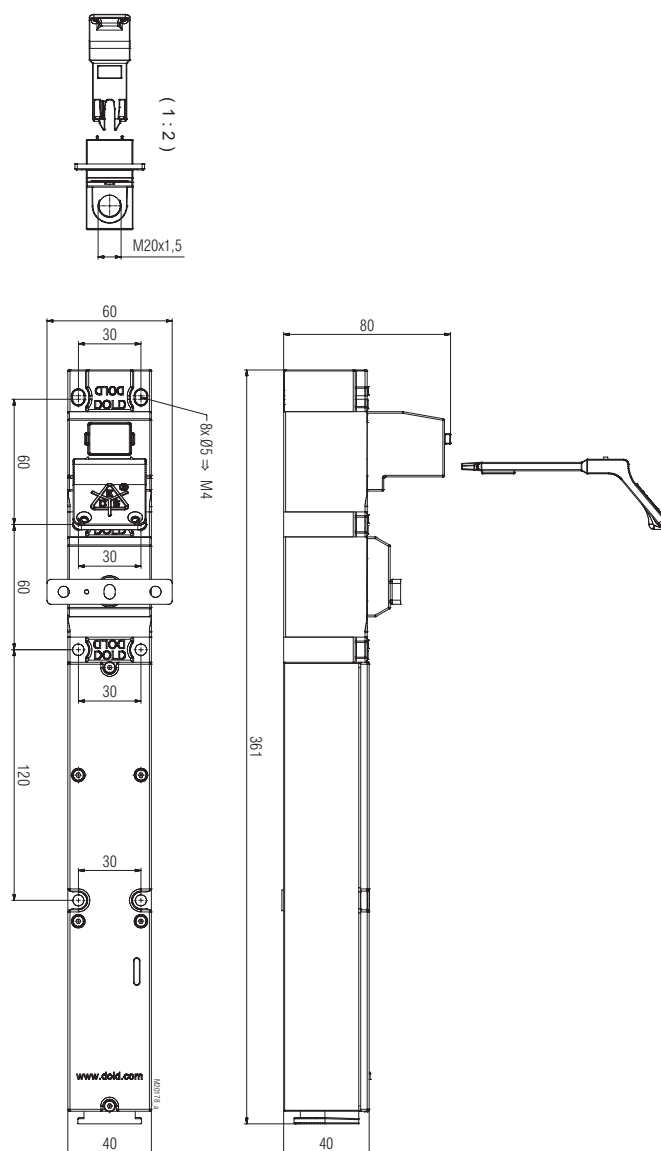

Illustrations: YRXK01M  
Clearance tolerances  $\pm 2\%$

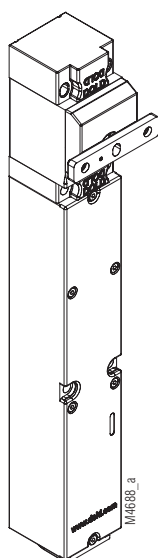


Illustration: YRXKM

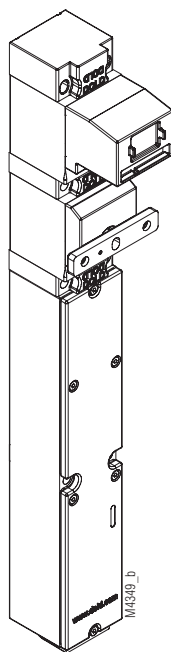


Illustration: YRXK01M