



**SAFEMASTER STS/K**  
Safety switch- and  
key interlock system  
Switch module SX/K

**Translation  
of the original instructions**

---

**0278800**



**E. DOLD & SÖHNE KG**  
P.O. Box 1251 • D-78114 Furtwangen • Germany  
Tel: +49 7723 6540 • Fax +49 7723 654356  
dold-relays@dold.com • www.dold.com

## Content

Symbol and Notes Statement.....	8
General Notes .....	8
Notes .....	8
Product Description .....	9
Installation Examples.....	9
Approvals and Markings .....	9
Design and Operation.....	9
Circuit Diagrams (Example SXB01M/K) .....	10
Technical Data .....	10
Safety Related Data .....	11
Dimension [mm].....	12
Variants and Accessories .....	12
Ordering Designation.....	12
Notice .....	19

## Symbol and Notes Statement



**DANGER:**  
Indicates that death or severe personal injury will result if proper precautions are not taken.



**WARNING:**  
Indicates that death or severe personal injury can result if proper precautions are not taken.



**CAUTION:**  
Indicates that a minor personal injury can result if proper precautions are not taken.



**INFO:**  
Referred information to help you make best use of the product.



**ATTENTION:**  
Warns against actions that can cause damage or malfunction of the device, the device environment or the hardware / software result.

## General Notes

The product hereby described was developed to perform safety functions as a part of a whole installation or machine. A complete safety system normally includes sensors (SAFEMASTER STS/K System), evaluation units, signals and logical modules for safe disconnections. The manufacturer of the installation or machine is responsible for ensuring proper functioning of the whole system. DOLD cannot guarantee all the specifications of an installation or machine that was not designed by DOLD. The total concept of the control system into which the device is integrated must be validated by the user. DOLD also takes over no liability for recommendations which are given or implied in the following description. The following description implies no modification of the general DOLD terms of delivery, warranty or liability claims.

## Notes



**Risk!**  
**Danger to life or risk of serious injuries.**

- Hazards must be ruled out before a key can be entered and the movable part of the guard can then be opened!



**INFO**

- For information regarding use in the system and validation according to EN ISO 13849-2, see SAFEMASTER STS application guide.
- Take advantage of the advice of the **E. DOLD & SÖHNE KG** specialists regarding the choice of units and combination of a system.



**ATTENTION !**

- To avoid wrong usage (e.g. by overload, mounting position or usage in acid, alkaline or other hostile ambient conditions) the limitations of the product have to be observed. Please check in advance if your application requires the usage of the more robust stainless steel model of SAFEMASTER STS. The requirements of the mounting and operating instruction must be fulfilled.



Before installing, operating or maintaining this device, these instructions must be carefully read and understood.



The installation must only be done by a qualified electrician!



The installation must only be done by a qualified mechanic!



Do not dispose of household garbage!  
The device must be disposed of in compliance with nationally applicable rules and requirements.



Storage for future reference.

To help you understand and find specific text passages and notes in the operating instructions, we have important information and information marked with symbols.

## SAFEMASTER STS/K Safety switch- and key interlock system Switch module SX/K



### STS/K-System Benefits

- EU-Test certificate according to the directive 2006/42/EG, annex IX
- For safety applications up to PL<sub>e</sub>/Cat. 4 according to DIN EN/ISO 13849-1
- Modular and expandable system
- Rugged stainless steel and plastic design
- Wireless mechanical safeguarding
- Combines the benefits of safety switch, locking module and key transfer in a single system
- Easy installation through comprehensive accessories
- Protection against lock-in
- Coding level low, medium, high according to DIN EN ISO 14119:2014-03

### Features

- Switch module for monitoring actuator and key position
- Module expansions possible only above the module
- With integrated LEDs for status indication
- Optional single-channel / redundant / diverse switch-off possible
- This module is also available in stainless steel


### Product Description

Switch modules SX/K is assembled together with other modules into a STS/K unit. They are used to secure separating guards by switching off hazardous movements. It must be ensured here that when the switch is being actuated the hazard will be stopped and/or the entries will be unlocked.

### Approvals and Markings



### Installation Examples

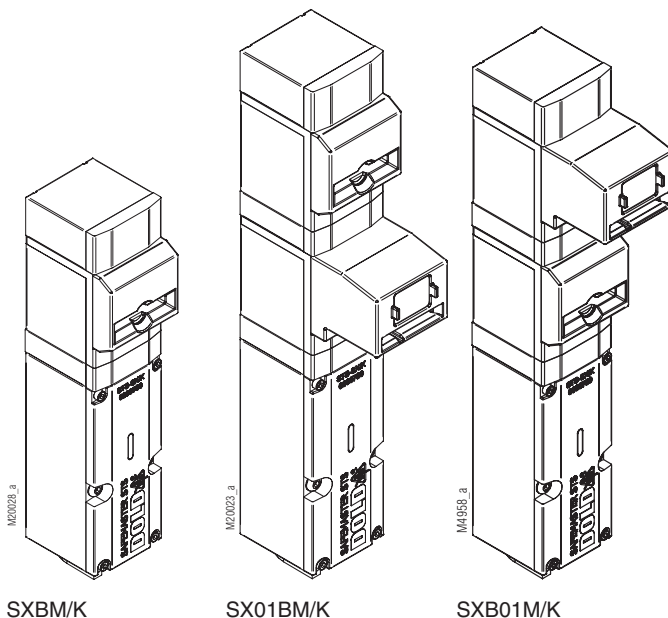


### Design and Operation


Switch module SX/K is a rugged and flexible switch module monitoring the safe position of one or several entries, e.g. protective hood or door, in the system. For this purpose the modules are used in connection with other mechanical STS/K modules, e.g. actuator modules B/K, key modules 01/K, R1/K and 01S/K and/or padlock module V/K. The key and padlock modules can be installed either above or below the actuator module used.

The switch module can also be used to only release keys in a key interlock system without an actuator module. This function is applied in key interlock systems with central shut-off or where the shut-off must take place outside the system, for instance in Ex zones, with strong vibration or dirt build-up, etc.

Optionally, 1-channel redundant or diverse shut-off is possible.

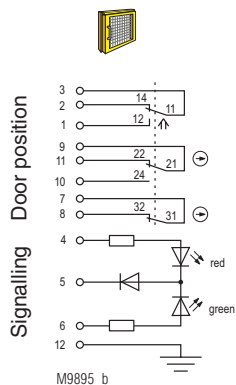

**Fig. 1:**  
Locked while activated:  
Actuator and key inserted,  
Door closed

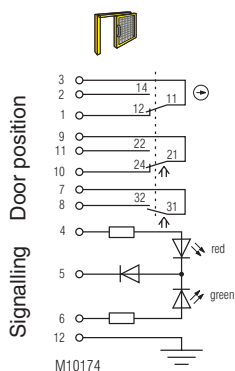

**Fig. 2:**  
Lock deactivated:  
Actuator removed  
Door open

Switching logic

		Fig. 1	Fig. 2
Door contacts	3	2	■
	3	1	□
	9	11	■
	9	10	□
	7	8	■

■ closed  
□ open

**Mechanical Data**

**Mechanical principle:** Rotating axis with redundant actuation  
**Enclosure:** PA + GF  
**Internal parts:** Stainless steel V4A / AISI 316 (acc. to EN 10027-2; 1.4401; 1.4404; 1.4542; 1.4301; 1.4310)  
**Degree of protection:** IP 65  
**Operating speed:** min. / max.: 100 / 250 mm/s

**Input**

**Nominal voltage  $U_N$  (Rated voltage):** AC/DC 24 V  
**Nominal voltage range:** 0.85 ... 1.1  $U_N$   
**Power consumption:** 0.3 W

**Output**

**Contacts:** 1 NC contact, 2 antivalent changeover contacts  
**Switching element:** IEC EN 60947-5-1 Appendix K  
**Switching principle:** Changeover contact with forced opening spring contact  
**Contact material:** Ag / AgSnO<sub>2</sub>  
**Max. switching frequency:** 360/h  
**Max. operating current:** 2 A  
**Utilization category of switching elements**  
 to AC 15: 1 A  
 to DC 13: 0.5 A  
**Electrical service life:** 5 x 10<sup>6</sup> switching cycles  
**Short circuit strength, Max. fuse rating:** 2 A gG  
**Conditional rated short-circuit current** (rated conditional short circuit current): 1000 A  
**Mechanical life:** 1 x 10<sup>6</sup> switching cycles

**General Data**

**Temperature range:** - 25°C to + 45°C  
**Storage temperature:** - 25°C to + 60°C  
**Rated impuls voltage:** 0.8 kV  
**Rated insulation voltage:** ≤ 50 V  
**Overvoltage category:** III  
**Pollution degree:** 2  
**Connection:** Cage clamp terminals  
**Cross sections** min. / max.: 0.25 / 0.75 mm<sup>2</sup> (with ferrules and sleeve according to DIN 46228-4)  
**Cable entry with thread:** 1 x M20x1.5  
**Intended use:** Up to max. cat. 4, PL e according EN ISO 13849-1  
**Mounting:** To DIN EN 50041  
**Test principles:** EN ISO 13849-1:2015  
 DIN EN ISO 14119:2014-03  
 EN 60947-5-1:2017  
 GS-ET-15:2015-05  
 GS-ET-19:2015-05  
 GS-ET-31:2010-02

## Safety Related Data

Data suitable for the PFH<sub>D</sub> summation method according to EN ISO13849-1:2016

Data according to EN ISO13849-1:2016	Switch Module SX/K			
Category	2	3	3	4
PL	d	d	e	e
PFH <sub>D</sub>	1,061E-09	6,84592E-10	5,44569E-10	1,00122E-10
T <sub>10D</sub>	20	20	20	20
CCF required	65-100	85-100	85-100	85-100
B <sub>10d</sub>	2.000.000	2.000.000	2.000.000	2.000.000
d <sub>op</sub> (d/a)	365	365	365	365
h <sub>op</sub> (h/d)	24	24	24	24
t <sub>cycle</sub> (h)	1	1	1	1
n <sub>op</sub>	8760	8760	8760	8760
Diagnostic coverage DC	60%	60%	90%	99%
Test interval according to ISO14119	1 / year	1 / year	1 / month	1 / month

Category 2: The prerequisites for installation and integration into a category 2 architecture must be met

Category 3: The prerequisites for installation and integration into a category 3 architecture must be met

Category 4: The prerequisites for installation and integration into a category 4 architecture must be met, in particular 2 actuators must be used

PFH<sub>D</sub>: A single module has no function. As a result, an individual module cannot have any safety-related characteristic values. The safety-related characteristic data in the table only serve to determine the values of a unit into which it is integrated.



When used as part of a **key transfer system**:

- PFH<sub>D</sub> total STS system = SUM PFH<sub>D1</sub> + ... PFH<sub>Dn</sub>
- Lowest category of a module = category of whole STS system
- Lowest DC of a module = DC entire STS unit



If the design of a unit is changed, the safety-related data may also change.

## Dimension [mm]

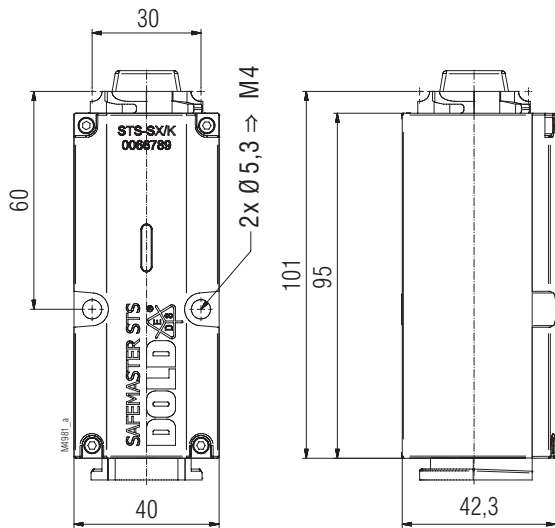

## Variants and Accessories

Switch modules RX/K

For applications where the key modules 10/K, 10S/K or actuator module K/K shall be installed above the switch module, version RX/K is available. For more information, refer to the data sheet for switch modules RX/K and also in the data sheet actuator module K/K.

## Ordering Designation

Switching module SX/K  
Article number: 0066789

DE	Notizen
EN	Notice
FR	Note

A large grid of graph paper with a dotted horizontal line running through the middle, intended for technical drawing or notes.

A series of horizontal lines on the right side of the page, intended for text notes.

